The approved brick direction, developed

Working documents: 352 Front Street West, Unit 105 · Customer entrance: 348 Front Street West



FORM / MATERIAL STUDY — NOT A SITE LAYOUT

OWNER-SELECTED VISUAL BASIS: R03 V02

Deep rounded opening, broad brick piers, curved cashier and opaque grey backing. Keep the floor flush.

NEW IN THIS ISSUE

A5 source control drawing and editable DXF.

One shared 3D component with matching plan, elevation, section and view from above.


Finish, service and measurement schedules.

The component is an unsized design study. No site heights, physical scale or fitted staff entrance are assigned. This issue develops the selected design without treating a rendering as measured geometry.

The supplied PDFs are the available base. The R03 image is AI generated; the R04 technical views are generated from the accompanying normalized component geometry.

A5 / source controls and layout constraints

Original plan underlay, independently retained written dimensions and source trace. Frontage is LEFT; owner’s left wall is TOP.

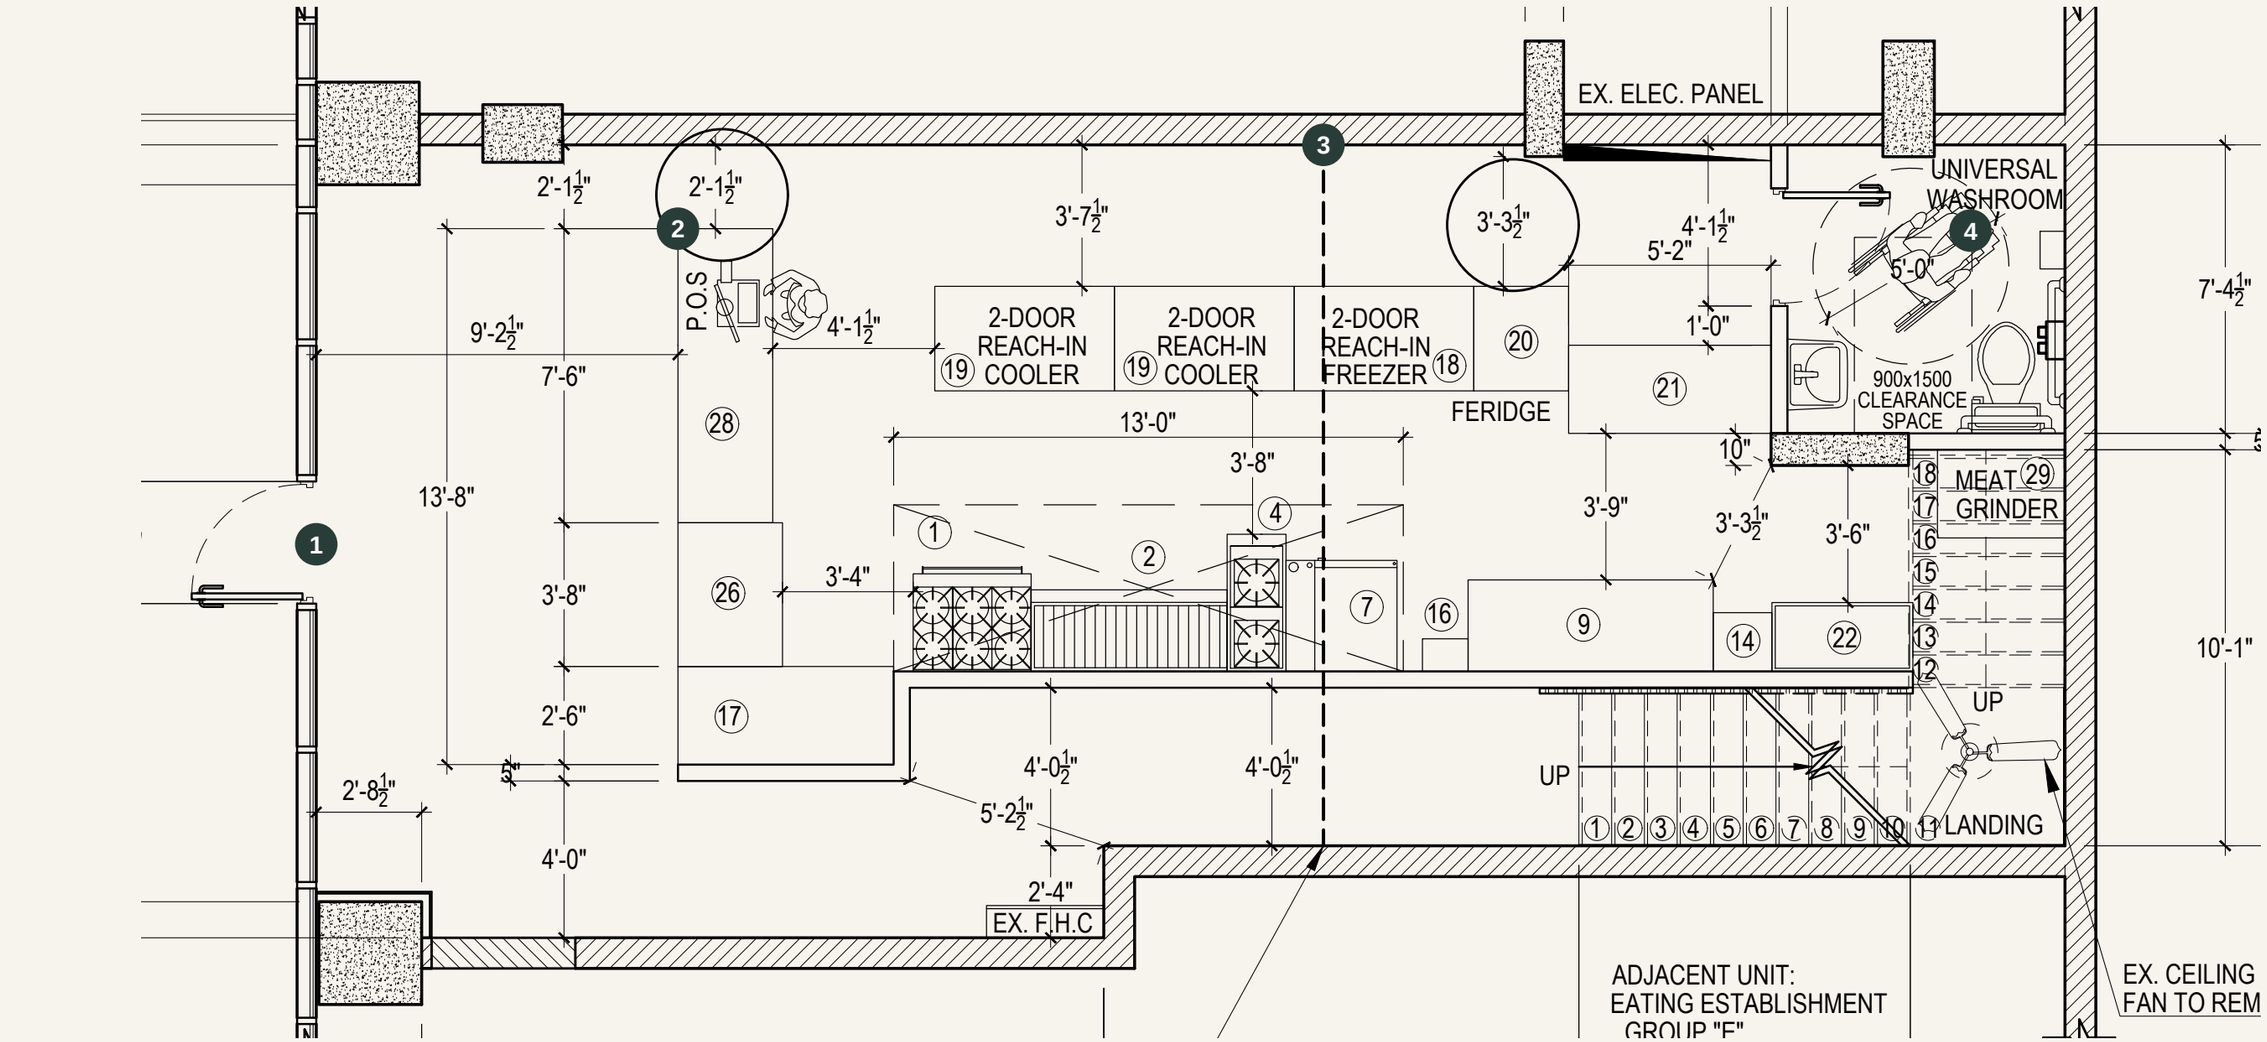

1 Frontage **2** A5 POS reference **3** Mezzanine floor-limit line **4** Retained universal WC


Written: overall 13,601.7 mm; front width 6,159.5 mm; rear width 5,448.3 mm; frontage–POS 2,806.7 mm. Split lengths 6,121.4 + 7,467.6 = 13,589.0 mm, leaving a 12.7 mm conflict with the overall.

Keep the guest-right stair route independent. The rear/guest-left WC approach is unresolved. Preserve 2 coolers + 1 freezer on the confirmed left side. A5 equipment boxes are not new enclosure walls; the new portal is not inserted here until staff/public fit and site controls are resolved.

Cashier / matched front and local plan

Both views use the accompanying component JSON/OBJ. Normalized width = 1.00; no physical units, site placement or construction dimensions.

FRONT ELEVATION

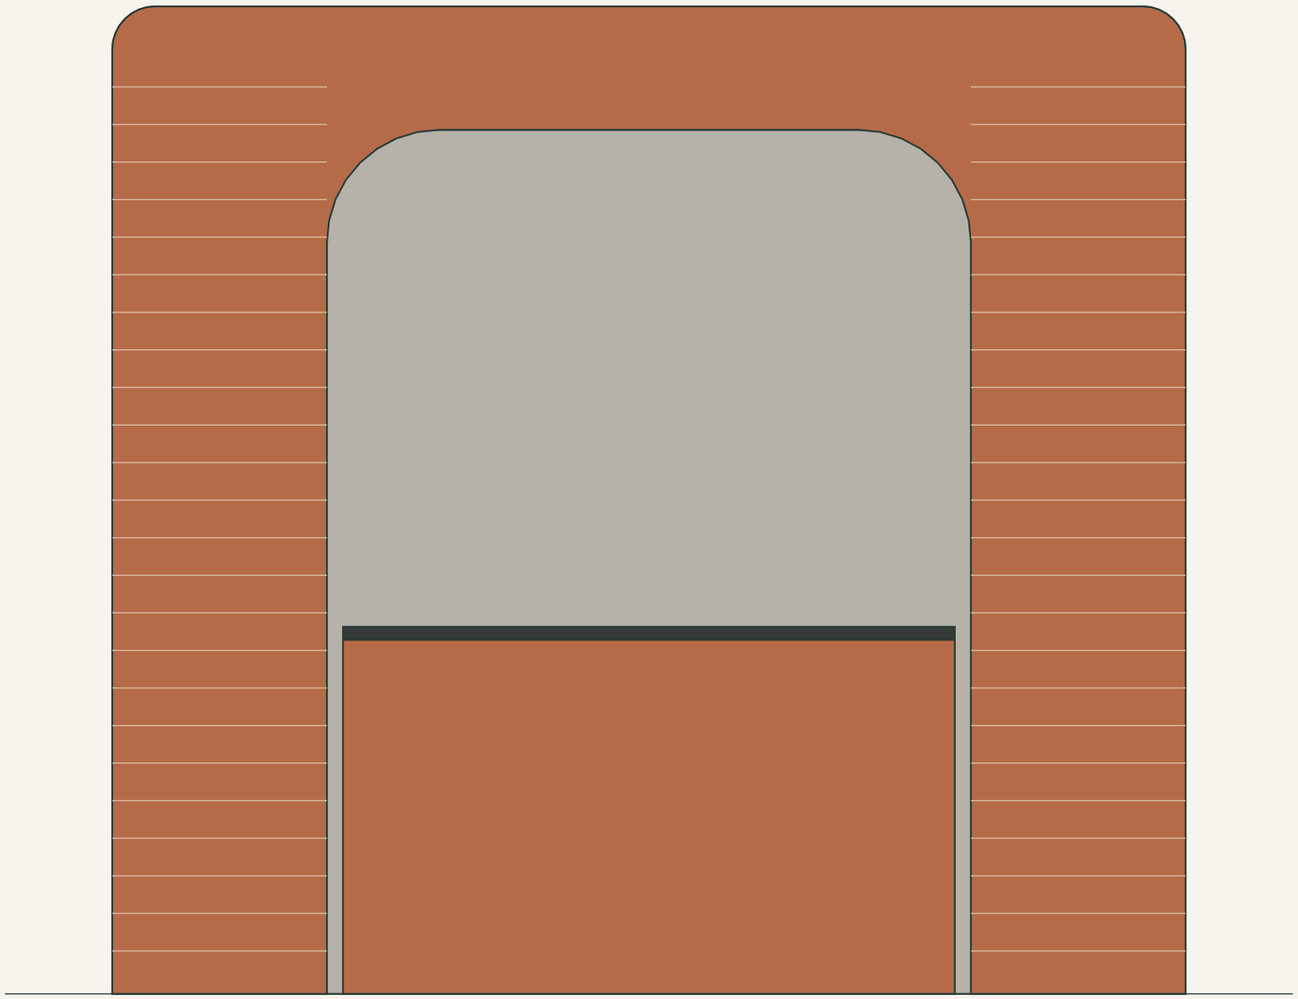

BR-01 / deep brick appearance

CT-01 / smooth dark worktop

PN-01 / opaque grey backing

LOCAL COMPONENT PLAN



FRONT / GUEST


Solid: piers, curved counter and opaque screen.
Dashed: roof extent above this component only.

The back recess expresses intended working space. Its width/depth and a concealed kitchen-side entry remain to be fitted. No door or accessible transaction position is falsely shown as resolved.

Soffit, backing and the finished top

Central longitudinal component cut and view from above share the same geometry. This is not a measured section through the shop or mezzanine.


CENTRAL SECTION / X = 0

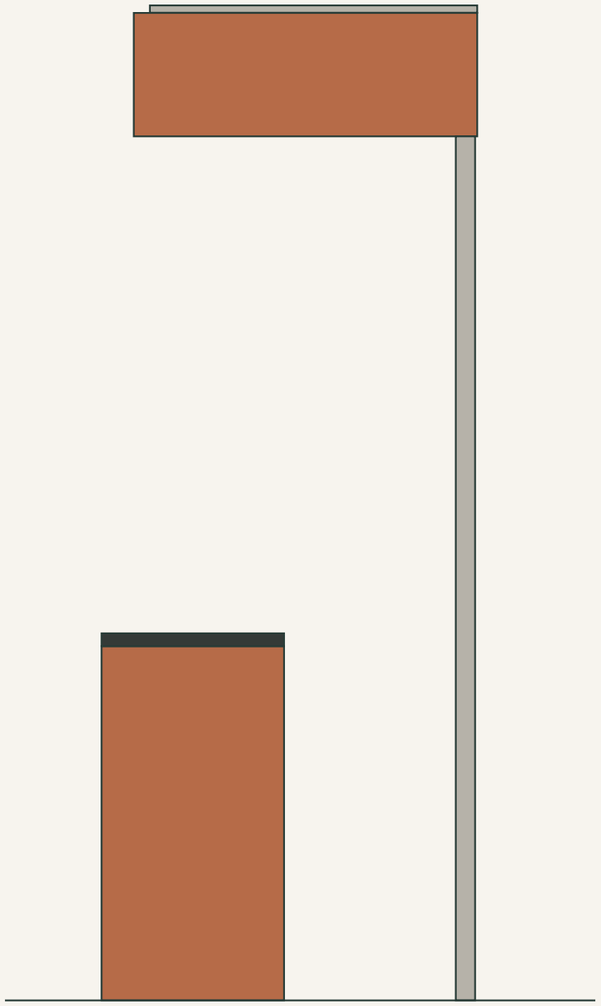

BR-02 overhead return

TP-01 finished top

No raised threshold. The staff band between counter and backing still needs a fitted entry and dimensional review.

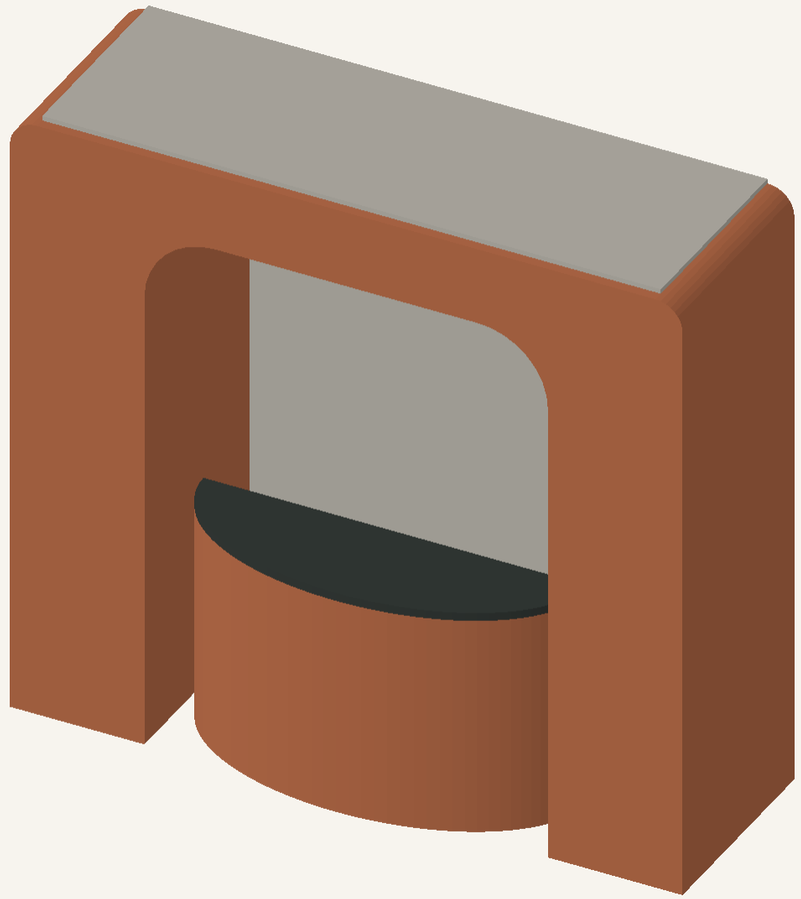

The grey cap is a proposed finish on the component top, visible from above. Extend it to the actual kitchen roof only after its extent is fixed. The view is an axonometric, not a verified seated mezzanine sightline.

Design separate load paths for decoration, kitchen enclosure and existing mezzanine. Use a reviewed overhead system with positive retention. Top: non-walkable, no storage; provide a safe cleaning/access method.

Service and circulation / develop in this order

Functional relationship diagram only. Boxes and arrows do not represent available floor area, door locations or a solved public washroom route.

ARRIVAL / PUBLIC

Order, payment and pickup
Ground dining target: 5–6

→

CASHIER / SCREEN

Curved counter + opaque backing
Separate payment and pickup

→

ENCLOSED KITCHEN

Screened internal staff/dispatch link
Staff entry to be located

GUEST-RIGHT ROUTE

Independent approach to stair / mezzanine
No fixed queue, stores or staff-door conflict

REAR UNIVERSAL WASHROOM

Retained in current baseline
Independent public approach still unresolved

1. Fit staff access and screened order transfer behind the cashier.
2. Fit accessible payment, pickup and the expected queue together.
3. Resolve the WC/public connection alongside the stair route.
4. Then fix portal width, depth, screen offset and roof projection.

COORDINATION STUDY · NOT FOR CONSTRUCTION

Materials / spend where the design is seen

Preferred design basis. Candidate systems remain subject to substrate, cleaning, slip, fire, load and installation evidence for their actual use.

ID / zone	Development choice	Cost and technical control
BR-01 / BR-02 Portal and soffit	Warm clay-brick appearance with light joints. Continuous piers and deep returns.	Keep brick concentrated on the feature. Overhead system needs engineered retention; vertical slips are not automatically suitable.
CT-01 / PN-01 / TP-01 Counter, backing, top	Smooth dark worktop; quiet opaque grey screen; cleanable mineral-grey upper surface.	Prioritize workable staff entry, transaction detail and service access over hidden decorative brick.
FL-G01 Ground public floor	Test the already exposed substrate for a retained concrete finish. Matte concrete-look porcelain is the fallback.	No repeat tile-removal allowance. Check moisture, cracks, levels, slip and thresholds before selecting the system.
FL-K01 / KW-01 / KW-02 Kitchen	Suitable concrete-look commercial tile; stainless at hot/greasy/splash zones; hygienic system elsewhere.	Price by exposure zone. Resolve coves, joints and substrate; metal does not upgrade an unsuitable backing.
WF-01 / WF-02 Public walls	Washable warm-grey paint as the economical base. Limit specialist mineral texture to a feature surface.	Sample the look first. Do not assume raw cement or limewash will be economical, durable or easy to clean.
FL-S01 / FL-M01 Stair and mezzanine	Coherent concrete appearance using a system suited to each actual assembly.	Survey complete stair and landings; verify upstairs load/movement. Do not assume a polishable concrete floor or add a new pour.
FF-01 / TX-01 / AC-01 Upstairs dining	Simple brown wood furniture, restrained Persian textile and tested acoustic absorption.	Fit seats and clear routes before purchasing. Secure any rug; keep stairs clear. Retain useful acoustic scope.

The measurements that unlock the fitted design

Use the supplied PDFs now; collect the following site controls for the next fitted plan and vertical model. A new DWG is not assumed available.

Control set	Record on site / from responsible designer	What it fixes
M-01 / plan coordinates	Storefront, clear entry, inside wall faces, columns, actual TV fascia and mezzanine edge. Tie them to a common datum.	Portal position; entry/queue; correct relation between old fascia and actual floor limit.
M-02 / levels and overheads	Ground finished level, underside/top of mezzanine, lowest beam/duct/hood/services, guard top and intended kitchen ceiling.	Height/depth of the portal; roof/top extent; service access; actual mezzanine view.
M-03 / staff + equipment	Selected equipment cut sheets, opening/ventilation/removal envelopes, service points, desired staff entry and order transfer.	Left-wall refrigeration fit; kitchen enclosure; viable cashier work recess.
M-04 / public facilities	Actual corridor, stair and washroom doors/swings, landings, all stair treads/risers and guard/handrail positions.	Public WC connection, guest route, dining/transaction accessibility, complete stair finish design.
M-05 / floor and supports	Ground slab/screed identity, moisture/cracks, floor build-ups, upstairs framing/deflection and verified support locations.	Appropriate concrete-look systems; transitions; engineered overhead/decorative attachment.

Also obtain the current accepted drawing/permit record and the actual CAD 102,000 + tax HVAC/ecology/gas quotation. No new project total, ordering release or construction progress is inferred in R04.

What the files contain / next coordination issue

The approved visual direction is recorded. The source reference, unsized component and later fitted restaurant model have distinct roles.

File	Purpose / units
R04_Design_Development.pdf + PNG sheets	Reviewable source-control and coordinated component views; finish, operation and measurement schedules.
R04_A5_Reference.dxf / .svg	Editable reference extraction from A5. DXF in nominal model millimetres, 1:1, derived from source print scale 1:64; source ink only, not a survey. No stretched dimension-chain repair.
R04_Portal_Component.obj + .mtl + .json	One shared component geometry. Unitless normalized width = 1; physical_scale_mm = null. Do not import as metres/mm or substitute for fitted CAD.
R04_Planning_Basis.md / control anchors JSON	Source trace, written dimensions, residuals and retained layout constraints.
R04_Design_Development_Schedule.md	Detailed finish IDs, staff/service strategy, lighting, acoustics, evidence and trade coordination sequence.

Next fitted issue: measured base + equipment, closed kitchen/public WC strategy, actual staff entry, accessible transaction, seating and queue, then complete roof/portal sections and independent support. The normalized component is adjustable when those controls are known.

Retained facts: only ground-floor tile/adhesive removal reported; refrigeration = 2 coolers + 1 freezer on the LEFT when entering; retained ground WC; future storage/extra upstairs WC separate and unapproved; no curved brick upper-mezzanine ceiling edge.

Delivery: use the private GitHub R04 folder while signed into the authorized account. The iPhone Safari workaround and concise app/support instructions are supplied separately.